

Ratio of basin lag times for runoff and sediment yield processes recorded in various environments

KAZIMIERZ BANASIK & AGNIESZKA HEJDUK

Warsaw University of Life Sciences – SGGW, Faculty of Civil and Environmental Engineering, 166 Nowoursynowska str., PL-02-787 Warsaw, Poland
kazimierz_banasik@sggw.pl

Abstract River basin lag time (LAG), defined as the elapsed time between the occurrence of the centroids of the effective rainfall intensity hyetograph and the storm runoff hydrograph, is an important factor in determining the time to peak and the peak value of the instantaneous unit hydrograph (IUH). In the procedure of predicting a sedimentgraph (suspended sediment load as a function of time), the equivalent parameter is the lag time for the sediment yield (LAG_s), which is defined as the elapsed time between the occurrence of the centroids of sediment production during a storm event and the observed sedimentgraph at the gauging station. Data of over 150 events recorded in 11 small river catchments (located in Poland, Germany, UK and USA) with a drainage area of 0.02 km² to 82 km² have been analysed to estimate the ratio of LAG_s/LAG . The ratio, in majority of cases was smaller than 1, and decreased with increase of river basin slope. Special attention is given to the data collected in a small agricultural catchment and also during snowmelt periods, which is located in central Poland.

Key words small catchment; soil erosion; suspended sediment; sediment graph; snowmelt event; IUSG

INTRODUCTION

Sedimentgraphs (graphs of suspended sediment load associated with hydrographs caused by rainfall or snowmelt) are essential for: (i) sediment yield assessment, (ii) providing input data for prediction models of sediment deposition in reservoirs, (iii) designing efficient sediment control structures, and for (iv) water quality predictions. One of the first studies on sedimentgraphs, i.e. on the relationship between the ordinates of the streamflow hydrograph and the sedimentgraph for a small catchment was undertaken by Johnson (1943). He developed a distribution graph of suspended sediment concentration which is analogous to a hydrograph. His results, which demonstrated that there was commonly a rapid initial rise of sediment concentration with increasing discharge and that the suspended sediment concentration reached a peak before the discharge peak, have been widely applied as a general behavioural model of suspended sediment response to heavy rainfall, and confirmed in further studies (Walling and Webb 1982, Froehlich 1986, 1991). Johnson's idea was implemented in a sedimentgraph model by Williams (1978). This was further developed for predicting and regenerating the suspended sediment load as a response of a small catchment to heavy rainfall (Banasik and Woodward 1992, Banasik and Blay 1994, Banasik and Walling 1996). A new definition of the instantaneous unit sedimentgraph (IUSG) was also developed (Banasik 1994, 1995; Banasik and Walling 1996) and incorporated into the sedimentgraph model (SEGMO), based on a lumped parametric approach.

River basin lag times, i.e. lag time for runoff (LAG), defined as the elapsed time between the occurrence of the centroids of the effective rainfall intensity hyetograph and the direct runoff hydrograph, and lag time for the sediment yield (LAG_s), defined as the elapsed time between the occurrence of the centroids of sediment production during a storm event and the observed sedimentgraph at the gauging station, are needed for estimating the IUH and IUSG parameters. The aim of the study is to present relationships between LAG_s and LAG for 11 small river catchments located in Poland, Germany, UK and USA, in which over 150 rainfall–runoff events were recorded, as well as to describe the IUSG procedure, for parameter description of which, the lag times are needed.

DESCRIPTION OF IUSG PROCEDURE AND PARAMETERS

The IUSG is defined as the time distribution of sediment generated from an instantaneous burst of rainfall producing one unit of sediment. The IUSG presented here is based on the IUH developed

by Nash (1957) i.e.:

$$u(t) = \frac{I}{k \cdot \Gamma(N)} \cdot (t/k)^{N-1} \cdot \exp(-t/k) \quad (1)$$

and the first-order kinetic equation written in dimensionless form and termed the dimensionless sediment concentration distribution (DSCD):

$$c(t) = \exp(-B \cdot t) \quad (2)$$

where $u(t)$ are the ordinates of the IUH (1/hour), N and k are the Nash model parameters: N is number of reservoirs (-), k is the retention time of reservoir (hours), $\Gamma(N)$ is gamma function, $c(t)$ are the ordinates of the DSCD (-), B is sediment routing coefficient (1/hour), and t is time (hours).

The IUSG is calculated by the formula:

$$s(t) = \frac{u(t) \cdot c(t)}{\int_0^{\infty} u(t) \cdot c(t) dt} \quad (3)$$

which, after inserting equations (1) and (2), produces the following formula (Banasik, 1994):

$$s(t) = \frac{B \cdot k + 1}{k \cdot \Gamma(N)} \cdot [t(B + 1/k)]^{N-1} \cdot \exp[-t(B + 1/k)] \quad \text{for } B \geq -1/k \quad (4)$$

where $s(t)$ are the IUSG ordinates (1/hour). The IUSG has three parameters N and k which are also IUH parameters and a third parameter B , the sediment routing coefficient.

The characteristic values of the IUSG (i.e. time to peak) can be calculated from the formula:

$$t_{ps} = \frac{(N-1) \cdot k}{1 + B \cdot k} \quad (5)$$

and the maximum ordinate of IUSG can be computed from the equation:

$$s_p = \frac{1 + B \cdot k}{k \cdot \Gamma(N)} \cdot \frac{(N-1)^{N-1}}{\exp(N-1)} \quad (6)$$

where t_{ps} is the time to peak of IUSG (hour), and s_p is the maximum ordinate of IUSG (1/hour).

As the respective values for IUH are calculated from the equations:

$$t_p = (N-1) \cdot k \quad (7)$$

and:

$$u_p = \frac{1}{k \cdot \Gamma(N)} \cdot \frac{(N-1)^{N-1}}{\exp(N-1)} \quad (8)$$

where t_p is time to peak of IUH (hour), and u_p is the maximum ordinate of IUH (1/hour), so the ratio of the characteristic values of IUSG and IUH can be computed from the formulae:

$$\frac{t_{ps}}{t_p} = \frac{1}{(1 + B \cdot k)} \quad (9)$$

and:

$$\frac{s_p}{u_p} = 1 + B \cdot k \quad (10)$$

It is clear that when B equals zero the characteristic values of IUH and IUSG are the same and the right side of equation (4) assumes the form of the IUH (equation (1)). It can also be found from equation (9), that for $B > 0$, the time to peak of the IUSG is shorter than the time to peak of the IUH, and the IUSG peak is higher than the IUH peak (equation (10)).

USE OF LAG TIMES IN ESTIMATION OF IUSG PARAMETERS

One of the characteristic values in rainfall–runoff models is the retention of the system or the lag time, defined earlier. For the IUH derived by Nash, the lag time is estimated using the formula:

$$LAG = N \cdot k \quad (11)$$

For the IUSG, the lag time (LAG_s) can be calculated using equation:

$$LAG_s = \frac{N \cdot k}{1 + B \cdot k} \quad (12)$$

Making use of equations (11) and (12), the routing coefficient B can be computed using the formula:

$$B = (LAG/LAG_s - 1)/k \quad (13)$$

Since LAG , LAG_s and k can be estimated from rainfall, runoff and suspended sediment data, the routing coefficient B , can be estimated using equation (13).

Inserting equation (13) into equations (9) and (10) one derives very useful formulae for the relationships between the characteristic values of the IUH and the IUSG. The ratios of lag times take the following forms:

$$\frac{t_{ps}}{t_p} = \frac{LAG_s}{LAG} \quad (14)$$

$$\frac{s_p}{u_p} = \frac{LAG}{LAG_s} \quad (15)$$

Equations (14) and (15) show the importance of hydrograph and sedimentgraph lag times in demonstrating how the IUSG characteristics can easily be derived from IUH characteristics.

Using measured data from rainfall–runoff events, the lag time can be calculated as:

$$LAG = M_{IQ} - M_{IP} \quad (16)$$

where M_{IQ} and M_{IP} are the first statistical moments of the direct runoff hydrograph and the effective rainfall hyetograph (h), respectively. Based on measured data, the lag time for the sedimentgraph (LAG_s) is defined as time elapsed between the centroids of the sediment production graph (similar to effective rainfall hyetograph) and the sedimentgraph, and can be computed from the formula:

$$LAG_s = M_{IS} - M_{IE} \quad (17)$$

where M_{IS} and M_{IE} are the first statistical moments of the graph of direct suspended sediment rate, and the graph of sediment production (h), respectively (Banasik *et al.* 2005).

Data of 152 recorded rainfall–runoff events in 11 small river catchments located in Poland, Germany, UK and USA were analysed to investigate the relationship between LAG_s and LAG .

DATA ANALYSED AND RESULTS

Sources of data

The data used in this paper for estimation the values LAG_s/LAG were collected in 11 small catchments of various land use and steepness by research units of six universities (Warsaw University of Life Sciences, Cracow Agricultural University, University of Kassel, Free University of Berlin, Exeter University and University of Illinois at Urbana-Champaign) and were analysed in depth in separate studies. Names of the catchments, their locations and some other characteristics are given in Table 1. The mean ratio of LAG_s/LAG , estimated on the basis of recorded individual rainfall–runoff sediment yield events, for each catchment is related to the steepness of the catchments.

Table 1 Characteristics of the catchments.

No	Catchment – notation	Catchment locality	Catchment area (km ²)	Number of events	Average value of Lag_s/Lag	Catchment steepness (m/km)	References
1	Zagożdżonka Z1	PL-lowland	23.4	21	0.90	5.5	R-1 [*])
2	Zagożdżonka - Z2	PL-lowland	82.4	4	0.59	4.1	R-2
3	Poniczanka	PL-Carpathians	33.1	12	0.86	90.1	R-3
4	Mszanka	PL-Carpathians	51.0	12	0.79	77.0	R-3
5	Kasinka	PL-Carpathians	32.0	13	0.93	115	R-3
6	Lubieńka	PL-Carpathians	48.7	16	0.96	77.9	R-3
7	Skawica	PL-Carpathians	48.6	11	0.72	166	R-3
8	Bauna	D - Hessen	45.0	10	0.66	42.2	R-2
9	Lainbach	D - Bavaria	15.8	6	0.34	201	R-4
10	Dart	UK - Devon	46.0	39	0.85	33.6	R-5
11	LVR	US - Illinois	0.023	8	0.78	19.0	R-6

R1^{*}), Banasik *et al.* 2006 (updated); R2, Barszcz *et al.* 2006; R3, Banasik *et al.* 2005; R4, Banasik and Blay 1994; R5, Banasik and Walling 1996; R6, Banasik and Mitchell 2008.

The catchment steepness has been defined by:

$$\Psi = \frac{H_{\max} - H_{\min}}{\sqrt{A}} \quad (18)$$

H_{\max} and H_{\min} are maximum and minimum catchment elevation (m), and A catchment area (km²).

The Zagożdżonka catchment, monitored by Warsaw University of Life Sciences – SGGW at two stream gauging stations (A of 23.4 and 82.4 km²), is located in central Poland (100 km south of Warsaw) and is characterised by very mild slopes, light soils and agricultural land use (mainly potato and small grain) with some forest areas. There are two types of flood events in the region: rainfall and snowmelt. The majority of the 25 rainfall events (items 1 and 2 in Table 1) have been recorded since 2000 (Banasik *et al.* 2006, Barszcz *et al.* 2006).

The data of five Carpathians catchments (A of 32.0–51.0 km²), located in southern Poland within the upper Vistula River basin, were collected by Cracow Agricultural University in the period 1976–1979. The catchments (items 3–7 in Table 1) are characterised by steep slopes and a significant ratio of forest area in the catchment areas, i.e. from 0.37 to 0.80 (Madeyski and Banasik 1989, Banasik *et al.* 2005).

The Bauna catchment (45 km²) to Kirchbauna gauging station is a typical small basin in a low mountain range in Hesse, Germany. However, the proportions of the urbanized area and of the impervious surfaces, in the period of field investigation, were 24% and 11%, respectively, and are therefore relatively high. The rest of the basin consisted of arable land (33%), woodlands (30%) and pastures (12%). The soils in the basin are of low permeability. The data were collected by the University of Kassel in the period of 2000–2004 (Barszcz *et al.* 2006).

The Lainbach creek is located in the Northern Limestone and Flysch Alps near Benediktbeuern, Upper Bavaria, about 60 km south of Munich. About 80% of the catchment (total area 15.8 km²) is covered by forest. The main sources of the sediments transported during storm events are several non-vegetated slopes. The data were collected by Free University of Berlin (Banasik and Blay 1994).

The River Dart is a west-bank tributary of the River Exe in southwest England, with a catchment area of 46 km². The catchment has an absolute relief of 228 m. Permanent pasture dominates the land use. The runoff and suspended sediment data were collected by the Department of Geography at the University of Exeter (Banasik and Walling 1996).

The Little Vermilion River (LVR) is located in East Central Illinois, USA, where the average annual rainfall is approximately 1010 mm. The M3 watershed, from which data were used in this investigation, has silty loam soils (called Sabina and Xenia), flat topography (slopes of less than 2%) and is totally used for row crop production, primarily corn rotated with soybeans (Banasik and Mitchell 2008). The data were collected by the University of Illinois at Urbana-Champaign.

At the gauging stations there were various ways of data collection. The manual one was used in the earlier investigations, i.e. catchments listed as 2–7, and automatic one (with application of sediment samplers and/or turbidity meters) used in the remaining catchments. The results of the mean values of LAG_s/LAG estimated for various catchments are related to the catchment steepness.

Ratio of lag time for runoff and sediment yield

The averaged ratios of the lag times, i.e. LAG_s/LAG for the considered river basins were from 0.34 for Lainbach – the very steep alpine catchment, characterised by steepness equal to 201, to 0.96 for Lubieńka, the Carpathian catchment, of steepness 77.9. For seven of the 11 considered catchments the ratios LAG_s/LAG were in the range 0.65–0.90, Two catchments have higher averaged ratios of the lag times than 0.90, and two have ratios smaller than 0.65.

The values LAG_s/LAG versus catchment steepness are presented in Fig. 1, with two regressions, a linear one and an exponential one.

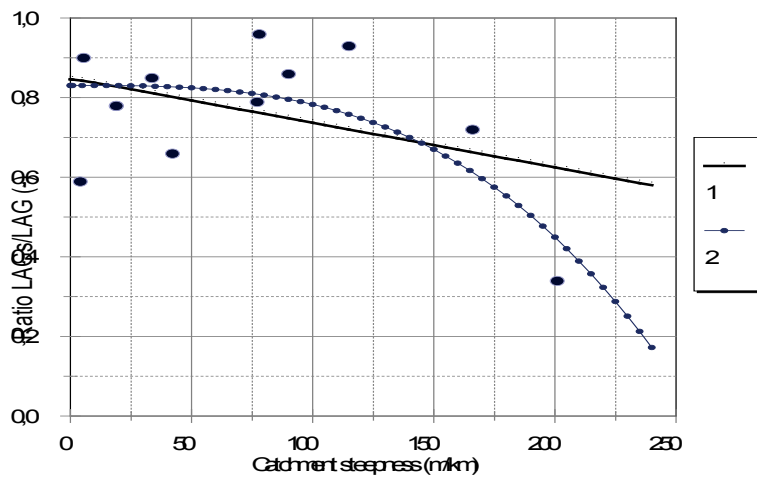


Fig. 1 The relationship between the mean ratio of LAG_s/LAG of 11 catchments and their steepness (dots), and linear (1) and exponential (2) approximations of the relationship.

The regression relationship between the mean ratio of LAG_s/LAG of the considered catchments and their steepness was established in linear form as:

$$LAG_s / LAG = 0.847 - 0.00112\Psi \quad (19)$$

with $r^2 = 0.162$ and with the standard error of estimation of $LAG_s/LAG = 0.174$; and in the exponential form as:

$$LAG_s / LAG = 0.831 - 4.76 \cdot 10^{-8} \Psi^3 \quad (20)$$

with $r^2 = 0.467$ and with the standard error of estimation of $LAG_s/LAG = 0.139$; where Ψ the catchment steepness defined by equation 18.

The analysis indicates that in the 11 small catchments considered, located in various environmental conditions of climate, topography and land use, the mean value of ratio LAG_s/LAG was always smaller than 1. There is also an indication that the ratio of LAG_s/LAG is slightly decreasing with the increase of catchment steepness.

Ratio of lag times for snowmelt events vs rainfall events of a small lowland catchment

More detailed data are presented for one of the earlier described catchments, i.e. for the Zagożdżonka catchment (23.4 km²) upstream of the Z1 (Czarna) gauge (item 1 in Table 1). The main characteristics of the 21 rainfall events, as well as 16 snowmelt events presented for comparison, are shown in Table 2. The catchment at this stream gauge has been monitored by the

Department of Water Engineering of Warsaw University of Life Sciences – SGGW, since 1980, however the rainfall and snowmelt events presented in Table 2 were collected in the period of 2000–2013.

Table 2 Characteristics of the recorded rainfall events and snowmelt events (snowmelt, usually with rain) with their lag times in Zagożdżonka catchment at Z1 (Czarna) gauge.

Category	Unit	Rainfall events (21)*		Snowmelt events (16)*	
		Value avg./event	Range	Value avg./event	Range
Snowmelt and/or rainfall					
depth, P_m	mm	17.3	3.0–60.9	30.0	5.9–64.0
Direct runoff, H	mm	1.05	0.20–5.16	3.23	0.26–16.2
Peak discharge, Q_{max}	$m^3 s^{-1}$	0.61	0.18–2.08	0.68	0.14–3.34
$Q_{max}/WQ_{50\%}$	–	0.59	0.17–2.00	0.71	0.24–3.31
Peak concentration, c_{max}	$mg dm^{-3}$	47.4	16.9–213.0	31.2	16.0–66.9
LAG	hours	7.75	2.42–17.2	17.8	7.14–31.8
LAG_s	hours	6.97	1.63–12.4	14.7	4.99–30.9
LAG_s/LAG	–	0.90	0.67–1.11	0.81	0.41–1.20

* numbers in parenthesis are numbers of recorded events; $WQ_{50\%}$, two-year-flood discharge

The size of the events can be characterised by the peak discharge (Q_{max}) related to the two-year flood ($WQ_{50\%}$). The ratio of the 21 rainfall events was from 0.17 to 2.00, with an average value of 0.59. The 16 snowmelt events, which were usually accompanied by rain, were characterised by higher values of the ratio, i.e. from 0.24 to 3.31, with an average value of 0.71. The range of the lag times for runoff and lag times for sediment yield, as well as mean values, presented in the Table 2, were significantly larger (over two times) for the snowmelt events than for the rainfall events. The relationship of LAG_s vs LAG for individual rainfall and snowmelt events are shown in Fig. 2.

One can see from Fig. 2 that in most cases, for both rainfall events and snowmelt events, the LAG_s is smaller than LAG (i.e. $LAG_s/LAG < 1$). There are only five of the 21 rainfall events (Fig. 2(a)), for which the LAG_s is larger than LAG , and there is only one such case among the 16 snowmelt events (Fig. 2(b)). The average value of the LAG_s/LAG of rainfall events is 0.90 and is larger than for snowmelt events, for which average LAG_s/LAG is 0.81 (Table 2).

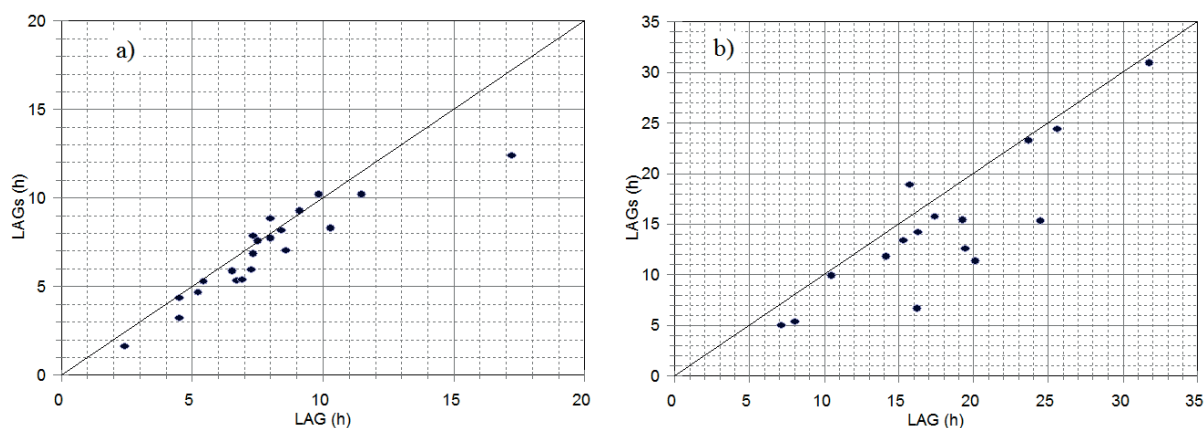


Fig. 2 The relationship of LAG_s vs LAG for individual rainfall events (a) and for snowmelt events (b) in the Zagożdżonka catchment at Z1 gauge (the straight lines are lines of equal values).

CONCLUDING REMARKS

The analysis of 152 recorded rainfall–runoff–sediment yield events in 11 small catchments located in central and south Poland, central and south Germany, southwest UK and east-central Illinois, shows that:

- the mean values of LAG_s/LAG are for all of the considered catchments smaller than 1 and within the range 0.34–0.96,
- the value of LAG_s/LAG decreases with the steepness of the catchment,
- the ratio LAG_s/LAG was, for the majority of individual events smaller than one,
- lag times and the relationship between the LAG_s and LAG are essential in predicting sediment-graphs and in estimating the parameters of the instantaneous unit sedimentgraph – IUSG,
- data from other catchments and further study are required to identify the factors controlling the relationship between LAG_s and LAG .

Analysis of the snowmelt and rainfall events in a small agricultural lowland catchment indicated that lag times, for both runoff and sediment yield, are more than twice as large for snowmelt than for rainfall events. The ratio LAG_s/LAG is smaller for snowmelt events than for rainfall events.

Acknowledgements The investigation was carried out with financial support from the PL-National Center of Science (NCN) within the research project N N305 144540. The support provided by the organization is gratefully acknowledged.

REFERENCES

- Banasik, K. (1994) Model sedymentogramu wezbrania opadowego w malej zlewni rolniczej (Sedimentgraph model of rainfall event in a small agricultural watershed, in Polish with an English summary). *Theses & Monographs of Warsaw Agricultural University-SGGW*, Warsaw, Poland.
- Banasik, K. (1995) A conceptual model of the instantaneous unit sedimentgraph. In: *Sediment and Water Quality in River Catchments*, ed. by I. D. L. Foster, A. M. Gurnell and B. W. Webb, 97–106. John Wiley and Sons Ltd., Chichester, West Sussex, UK.
- Banasik, K., Barszcz, M. and Hejduk, L. (2006) Importance of watershed lag times in IUSG development. In: *Sediment Dynamics and the Hydromorphology of Fluvial Systems* (Proceedings of a symposium held in Dundee, UK, July 2006). IAHS Publ. 306, 574–581. IAHS Press, Wallingford, UK.
- Banasik, K. and Bley, D. (1994) An attempt of modelling of suspended sediment concentration after storm event in an Alpine torrent. In: Ergenzinger P., and Schmidt K.-H. (eds), *Dynamics and Geomorphology of Mountain Rivers*. Springer Verlag, Berlin, 161–170.
- Banasik, K., Madeyski, M., Mitchel, J.K. and Mori, K. (2005) An investigation of lag times for rainfall-runoff-sediment yield events in small river basin. *Hydrologic Science Journal* 50(5), 857–866.
- Banasik, K. and Mitchel, J.K. (2008) Conceptual model of sedimentgraph from flood events in a small agricultural watershed. *Annals of Warsaw University of Life Sciences – SGGW, Land Reclamation*. 39, 49–57; (http://ann_landreclam.sggw.pl/z39/art4.pdf).
- Banasik, K. and Walling D.E. (1996) Predicting sedimentgraphs for a small agricultural catchment. *Nordic Hydrology*, 27(4), 275–294.
- Banasik, K. and Woodward, D. E. (1992) Prediction of sedimentgraph from a small watershed in Poland in a changing environment. In: *Saving Threatened Resources – in Search of Solution* (Proc. of the Irrigation and Drainage Session at Water Forum'92), ed. by Engman, T., 493–498. ASCE, New York.
- Barszcz, M., Banasik, K. and Tönsmann F. (2006) Estimation of lag times of rainfall events for three small river basins. *EJPAU (Electronic Journal of Polish Agricultural Universities)*, 9(2), #30 (<http://www.ejpau.media.pl/volume9/issue2/art-30.html>).
- Froehlich, W. (1986) Sediment delivery model for the Homerka drainage basin. In: *Drainage Basin Sediment Delivery*, ed. by R.F. Hadley (Proceedings of a symposium held at Albuquerque), IAHS Publ. 159, 403–412. IAHS Press, Wallingford, UK.
- Froehlich, W. (1991) Sediment production from unmetalled road surfaces. *Sediment and Stream Water Quality in a Changing Environment: Trends and Explanation* (Proceedings of the Vienna Symposium, August 1991), IAHS Publ. 203, 21–29. IAHS Press, Wallingford, UK.
- Johnson, J.W. (1943) Distribution graphs of suspended-matter concentration, *Trans. ASCE*, 108, 941–964.
- Walling, D.E. and Webb B.W. (1982) Sediment availability and the prediction of storm-period sediment yields. In: *Recent Development in the Explanation and Prediction of Erosion and Sediment Yield* (Proceeding of the Exeter symposium), IAHS Publ. 137, 327–337. IAHS Press, Wallingford, UK.
- Williams, J.R. (1978) A sediment graph model based on the instantaneous unit sediment graph. *Water Resources Research* 14(4), 659–664.